



LED FESTOON STRING LIGHT – INSTALLATION INSTRUCTIONS

LED-FEST20DWW

WARNING: When using outdoors, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury. Install in accordance with these instructions.

CAUTION: Risk of electric shock. Avoid making connections or disconnections when the equipment is wet. Do not use with extension cord near or where water may accumulate. Do not submerge. Keep lamps at least 5 meters from pool and spas. Keep receptacles dry.


CAUTION: To reduce the risk of fire, electric shock, or injury:

1. Commercial grade string light is intended for installation indoor or outdoor
2. String lights must be supported by steel guide cables or other suitable supporting hardware such as screws or cable ties (not included) at each light fixture
3. Light sockets must only be installed base up so that bulbs are facing down
4. Keep combustible material clear of bulbs. Do not allow lamps or sockets to come into contact with walls, fabrics, blinds, or other materials. Lamps should hang freely in a downward direction with a minimum of 10cm between the bulb and the nearest object
5. Do not cluster the bulbs
6. Not intended for installation in ceilings, soffits, cabinets, or other enclosed spaces
7. Do not secure light string to buildings or other structural supports using nails, staples, or other sharp, conduction materials. **DO NOT DAMAGE THE WIRE**
8. Avoid damage to the insulation during installation. Do not pierce or otherwise compromise the wire or socket's outer covering
9. Periodically inspect wire and sockets for degradation due to weather, UV light, or other damage. Promptly replace worn out light string
10. Do not exceed 1100W when connecting multiple strings


WARNING: Risk of electric shock. Disconnect power at source prior to wiring, re-lamping, or servicing in any way. Light string kits are supplied with an attached two prong plug. Do not alter the plug.

Installation Methods

1. Using a guide wire with cable ties (not included)

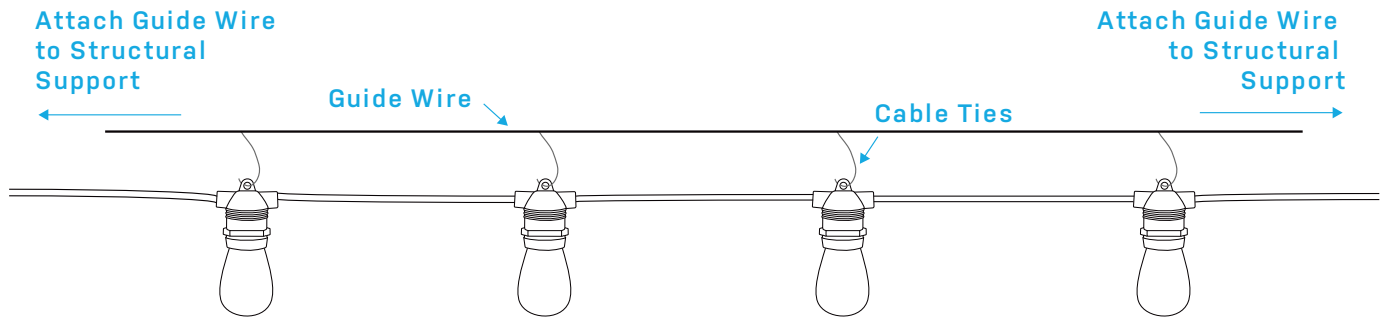

2. Attaching directly to a structure:

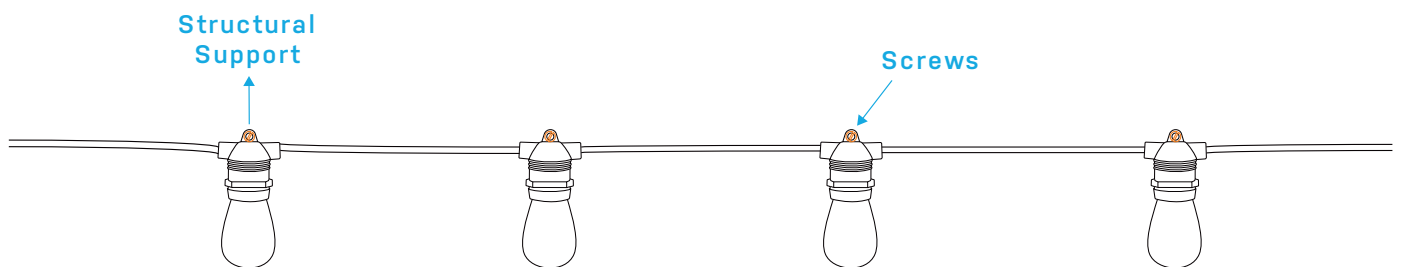

NOTE: Directly attach each bulb to the structure or guide wire.

Re-Lamping Festoon Lights

Disconnect power at source prior to re-lamping. For outdoor string lights, do not re-lamp during rain or when wet. Re-lamp only during dry and calm weather conditions.

1. Disconnect power at source
2. Unscrew existing lamps by lightly holding the socket in one hand and twisting the lamp counter clockwise. Lamps may be tight in the sockets. This is normal to prevent moisture from getting into the socket.
3. Replace with E27 bulbs. Screw bulb clockwise until top of socket forms a tight seal around bulb and bulb makes solid contact.

NOTE: Do not exceed 1100W across all sets combined. Suitable for use with incandescent, CFL, LED or CCL lamps.